



To keep pace with requirements for streaming electronics, Northern Lights is pleased to offer the S-TSC Control System.

The S-TSC control can be fitted with an optional shielded cable to interface with the ship's multi-function display, for a truly integrated and intuitive generator display experience.

S-TSC CONTROL PANEL

- One touch run/stop function
- Customizable warnings and shutdowns
- Easy-to-read push buttons and backlit LED screen



FEATURES AND FUNCTIONS

- SAE J1939 CAN bus protocol
- RPM via J1939, magnetic pickup or generator
- Autostart even on low battery
- Manual and remote start
- Emergency stop
- Passcode protected for vessel security
- Maintenance timing counter
- Exerciser clock
- Tracking log for up to 150 events
- Designed to protect against moisture
- Common sensor (i.e. VDO, Datcon) compatibility.

AVAILABLE DISPLAYS

TSC offers the display data most critical to the proper maintenance and functionality of your Northern Lights generator set. Adding a NMEA2000 compatible cable allows S-TSC to access all of your vessel's most crucial data.

- Engine temperature
- Oil pressure
- Fuel level
- AC metering
- Battery voltage
- Engine speed
- Engine hours
- Text
- Time and date
- Custom senders
- Customizable warnings and shutdowns

MECTRA SYNERGY (M) SDN BHD

B-13-11 MENARA PRIMA, JALAN PJU 1/39
DATARAN PRIMA, 47301 PETALING JAYA
SELANGOR, MALAYSIA
TEL: +603-7886 1732
EMAIL: sales@mectra.com.my
WEBSITE: www.mectra.com.my

PROGRAMMABLE ALARMS AND FUNCTIONS


Customize the amount of data that is most important to you.

- Overcrank
- Coolant temperature
- Oil pressure
- DC voltage
- Over/Under voltage
- Over/Under current
- Over/Under speed

Available with local and remote panel access, with a sleek simple design that compliments any engine room.

NMEA2000 Compatibility

- Available through custom cable, in lengths of 25' (7.5 meters).
- Remote paneling available up to 128' (39 meters).
- Interfaces the S-TSC's SAE J1939 CAN data stream to an NMEA 2000 gateway.
- Reliable twisted-pair cable with 8-pin/5-pin connectors.
- Available on units **up to 40kW**.

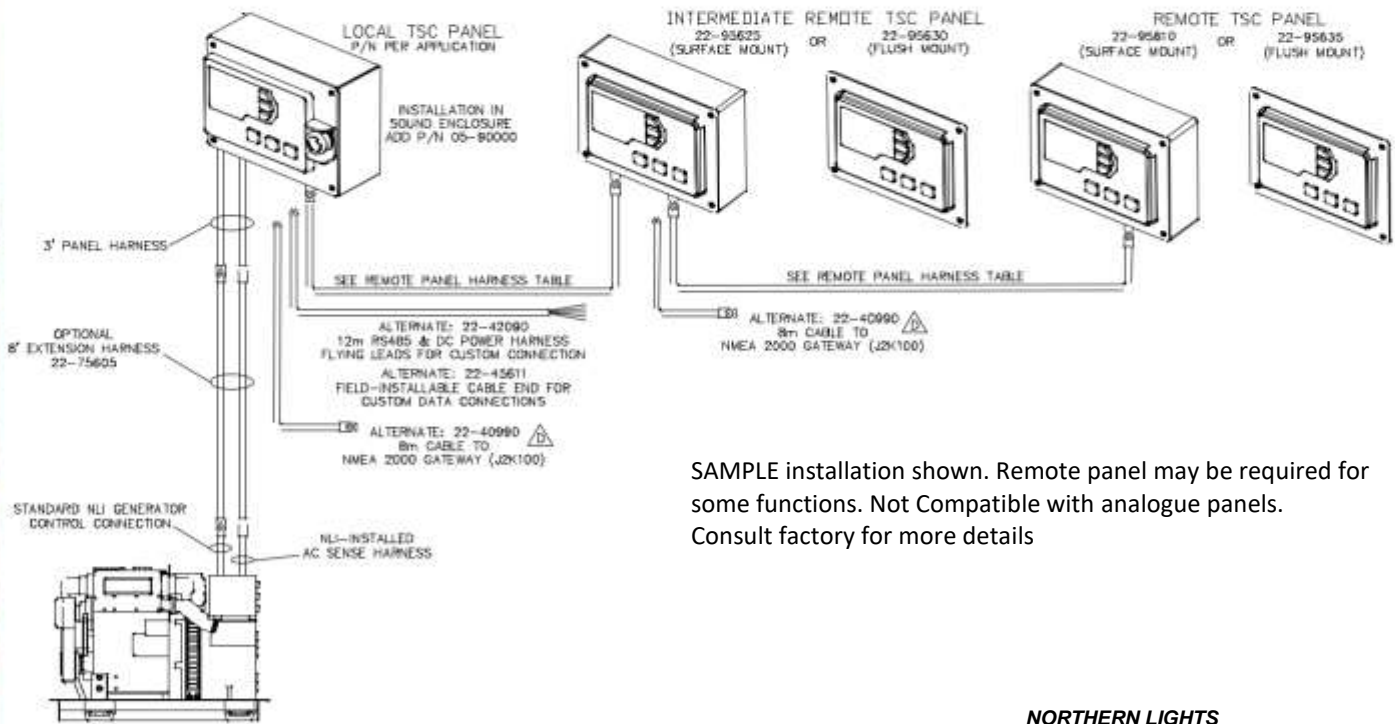

SAMPLE installation shown. Remote panel may be required for some functions. Not Compatible with analogue panels. Consult factory for more details

NORTHERN LIGHTS